


RG-EG300GH-E Series Reyee 5/10-Port High Performance Cloud Managed Office Router


DATASHEET

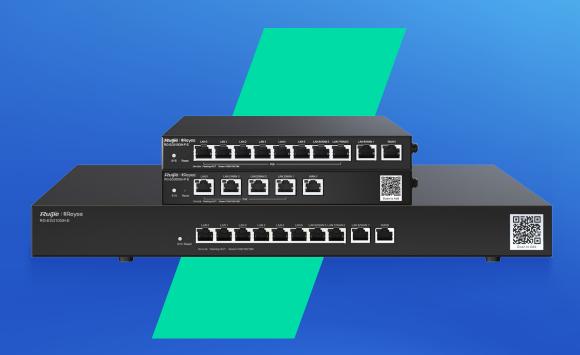

Highlights

- High-performance router for office network
- Provide powerful VPN for branches and remote workers
- Provide traffic visualization monitoring, everything in a glance
- New efficient way of bandwidth management based on application and user
- Unbreakable multi-WAN, intelligent load balancing

Highlight Features

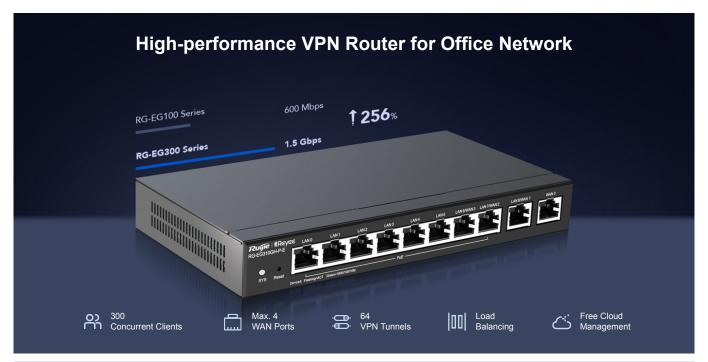




.


...........

Highlight Features

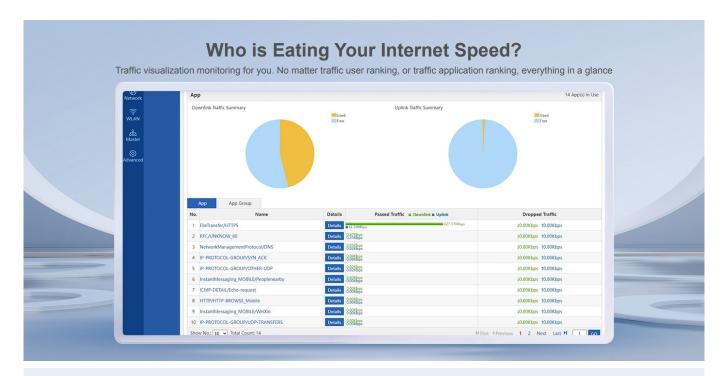

New Efficient Way of Bandwidth Management


Application Based Bandwidth Management



User Based Bandwidth Management



Highlight Features

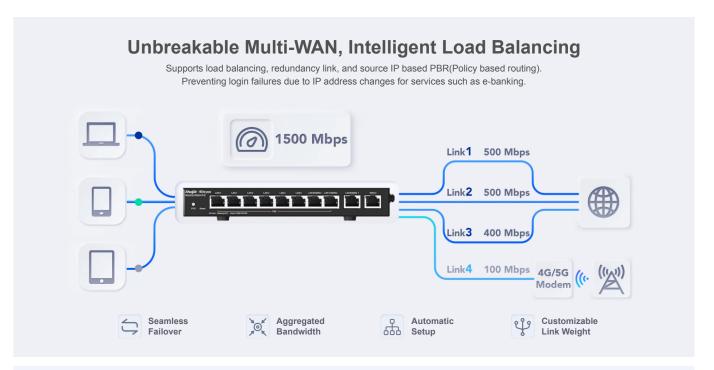



.

.



Physical Basic			
Model	RG-EG305GH-P-E	RG-EG310GH-P-E	RG-EG310GH-E
Fixed WAN Port		1×10/100/1000 Base-T	
Fixed LAN Port(s)	1×10/100/1000 Base-T	6×10/100/1	000 Base-T
LAN/WAN Switchable Port(s)		3×10/100/1000 Base-T	
Performance	1.5 Gbps (1518 Byte,NAT+Flow Audit) 1000 Mbps (1518 Byte,NAT+Authentication, Applicaation Identification, Flow Audit and Flow Control)		
Throughput		1.5 Gbps	
Recommended Clients		300	
Power Consumption	≤ 80 W (With PoE full load)	≤ 130 W (With PoE full load)	≤ 15 W
	Software Fe	eature	
Network Access Mode	PPPoE Client DHCP Client Static IP		
Automatic Identification of Internet Type		~	
Avoidance of WAN IP Address Conflicts	✓		
Learning PPPoE Account & Password	✓		
VLAN	Support, 8		
IPv6	✓		
IPTV	~		
AC Mode		~	
Behavior Management	Ар	p Block (Time/IP-based Poli Website Filtering	icy)
Application Recognition	Identify 100+ Applications, including Office, IM, Web Page, Online Shopping, Online Gaming, P2P Download and Popular Videos		
Application Priority		~	



Software Feature			
Model	RG-EG305GH-P-E	RG-EG310GH-P-E	RG-EG310GH-E
Flow Control	Smart Flow Control Custom flow Control Policies IP-based Automatic Bandwidth Assignment		
Traffic Audit		Real-time Traffic Audit	
Diagnosis		~	
Marketing authentication	WiFiDog (SMS	authentication and one-click	cauthentication)
Local authentication	Portal Authentication Password Authentication QR Code Authentication		
Max Manager Reyee Switchs	128		
No. of PPPoE Server Account	64		
L2TP VPN	~		
PPTP VPN	~		
IPsec VPN	✓		
OpenVPN	~		
No. of PPTP&L2TP&OpenVPN Account	300		
Overall IPsec VPN Performance	230 Mbps		
Overall L2TP VPN Performance	640 Mbps		
Overall OPENVPN Performance	100 Mbps		
IPsec VPN Tunnels	64		
OpenVPN Tunnels	64		
L2TP VPN Tunnels		64	
Static routing		~	
RIP/RIPng		~	
Policy-Based Routing (PBR)		~	



Software Feature			
Model	RG-EG305GH-P-E	RG-EG310GH-P-E	RG-EG310GH-E
WAN Port Failover		~	
WAN Load Balancing		~	
Load balancing based on source address		~	
Flow-based Load Balancing		~	
Port-based weighted load balancing of data streams		~	
PPPoE Client		~	
PPPoE Server		~	
DHCP Server		~	
DNS Server		~	
DNS Client		~	
DNS Proxy		~	
NTP Client		~	
DDNS	Oray D	DNS,DynDns, NO-IP, Ruijie	DDNS
NAT		~	
NAPT		~	
NAT ALG		~	
Port Mapping		~	
UPnP		~	
MACC		~	
ACL		~	
Time-based ACLs		~	
Malicious Attacks Defense		~	



Software Feature			
Model	RG-EG305GH-P-E	RG-EG310GH-P-E	RG-EG310GH-E
ARP binding		~	
Prevent Port Scan Attack		~	
Prevent Fragmentation Attack		~	
Prevent Teardrop Attack		~	
Prevent Ping of Death Attack		~	
Prevent Land Attack		~	
Prevent Smurf / Fraggle attack		~	
Prevent SYN Flood Attack		~	
Cloud Management		~	
APP Management		~	
APP Upgrade		~	
APP Restart		~	
Scheduled Restart		~	
Default Access/Password	No	192.168.110.1 Password Required by Defa	ault
Local Upgrade		~	
Online Upgrade		~	
Backup		~	
Factory Reset		~	
Language		Chinese English Vietnamese Indonesian Thai Arabic Traditional Chinese Spanish Russian	



Hardware Feature			
Model	RG-EG305GH-P-E	RG-EG310GH-P-E	RG-EG310GH-E
CPU		2 Cores, 1.35 GHz	
SDRAM/RAM		512 MB	
Flash Memory		256 MB SPI NAND FLASH	
Power Supplies	DC 54V/1.48A (Adapter included)	DC 54V/2.4A (Adapter included)	100V~240V AC, 50/ 60Hz
PoE Standard	IEEE 80	02.3af/at	NA
PoE Power Budget	60 W	110 W	NA
DC Port Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Length: 10 mm (Outer Diameter: 0.22 in. Inner Diameter: 0.08 in. Length: 0.39 in.)		NA
Indicator	1×system LED indicator		
Buttons	1×Reset button		
Dimensions(W×D×H)	202 mm x 28 mm x 108 mm (7.9 5 in. x 1.1 in. x 4.25 in.)		43.6 mm x 440 mm x 200 mm (1.72 in. x 17.32 in. x 7.87 in.)
Weight	0.5 kg (packages not included)	0.55 kg (packages not included)	2.4 kg (packages not included)
Installation	Desk-mounted		Rack-mounted
Rack Dimensions	NA		1U 19-inch Rack-mounted
Dissipation Mode	Air-cooled Heat Dissipation		
Fan	Fansless		
Operating Temperature	0°C to 40°C (32°F to 104°F)		
Storage Temperature	-40°C to 70°C (-40°F to 158°F)		
Operating Humidity	10% to 90% Noncondensing		



Hardware Feature			
Model	RG-EG305GH-P-E	RG-EG310GH-P-E	RG-EG310GH-E
Storage Humidity	5% to 90% Noncondensing		
Port Surge	4 kV		
IP(Ingress Protection)		IP20	

Package Contents

Device	RG-EG305GH-P-E	RG-EG310GH-P-E	RG-EG310GH-E
Foot Pad	4	4	4
Power Adapter	1	1	-
Power Cord	1	1	1
Mounting Bracket	-	-	2
M4 x 8 mm Screw	-	-	6
Power Cord Retention Clip	-	-	1
User Manual	1	1	1
Warranty Card	1	1	1
Package Weight	1.5 kg	1.6 kg	3.4 kg
Package Dimension (w x d x h)	305 mm x 289 mm x 64 mm	305 mm x 289 mm x 64 mm	536 mm x 351 mm x 110 mm



Redefine your easy network



Ruijie Networks Co., Ltd Floor 11, East Wing, Zhongyipengao Plaza, No.29 Fuxing Road, Haidian District, Beijing China Website: https://www.ruijienetworks.com